

**FEATURES:**

- The LED lights up immediately, no more spending time checking from port to port to find the tone.
- Easily saves 5 to 10 times of time and cost
- No more pre-labeling of cables
- No more lost time when cable labels fall off during pulling
- IDC connector can accept 22-26 AWG solid and stranded cables.
- Supports T568 A&B Wiring & Easy installation.
- Backward compatible to Category 5e, 5, and 3.



**CHARACTERISTICS:**

**\*Panel:**

Item	Material	Thickness	Plated	Dimensions and Mounting
Panel	SECC	1.5mm	Painted black	EIA – 310-D

**\*IDC Connector:**

Item	Material or Feature
Operating life	Minimum 250 Re-terminations
Contact Material	Phosphor bronze
IDC Contact Plating	Tin plated over Nickel
IDC Plastic Housing	PC, UL94V-0

**\*Jack Connector:**

Item	Material or Feature
Operating life	Minimum 750 insertions
Contact Material	Phosphor bronze
Jack Contact Plating	50µ inch thickness gold over Nickel
Jack Plastic Housing	Glass filled polyester UL94V-0

**\*Printed Circuit Board:**

Item	Material or Feature
Materials	FR-4
Thickness	1.6mm

**\*Accessories:** Cable ties, M6x12 screws.


**APPROVAL:**

- Performance conforms to TIA/EIA-568-B.2-1, ISO/IEC 11801 and EN 50173-1 Category 5e specifications.
- UL/cUL Listed.

**APPLICATIONS:**

- 1000BASE-TX Gigabit Ethernet
- 100BASE-TX Fast Ethernet
- 10BASE-TX Ethernet
- Voice, Video and other application

**TYPICAL PERFORMANCE:**

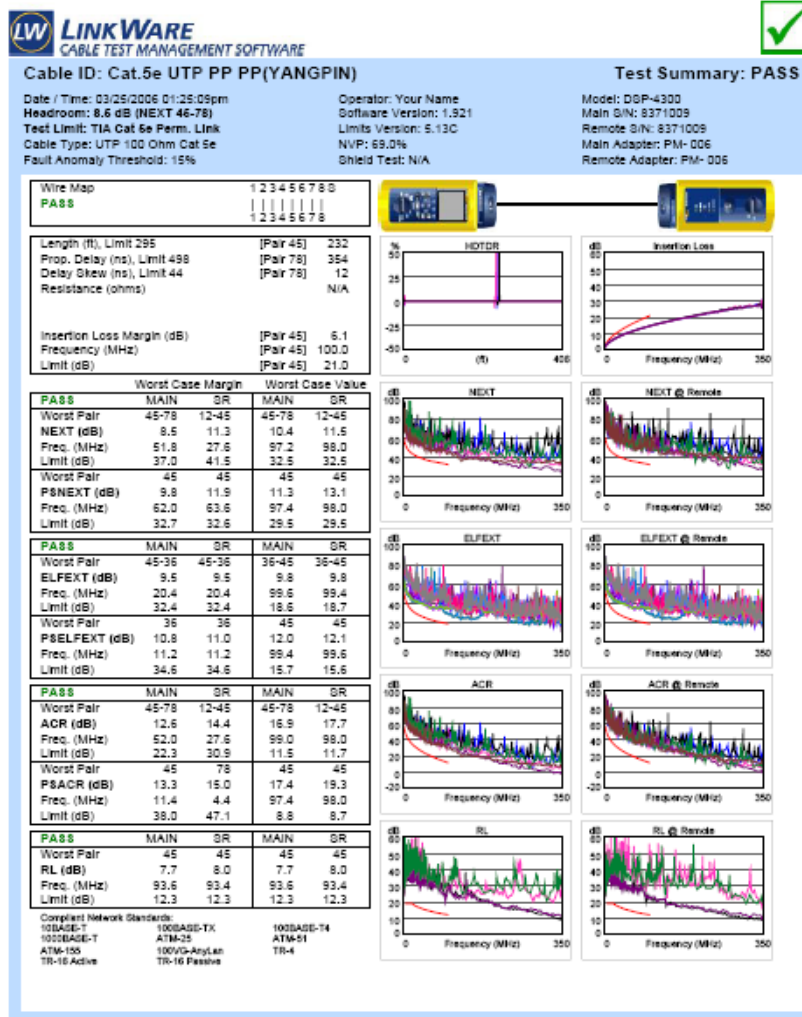


Site: Client Name

YANGPIN-2.flw



**DRAWING:**

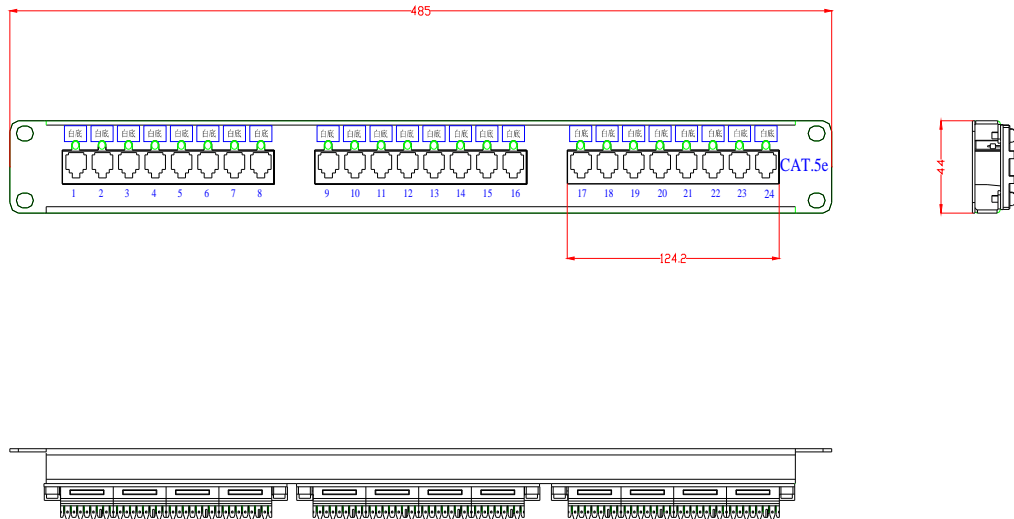

**ORDERING INFORMATION:**

Part NO.	175522412
Description	Premium-Line cat.5e unshielded Navigator patch panel, Dual type IDC, 24 ports, Black