

FEATURES:

- The LED lights up immediately, no more spending time checking from port to port to find the tone.
- Easily saves 5 to 10 times of time and cost
- No more pre-labeling of cables
- No more lost time when cable labels fall off during pulling
- IDC connector can accept 22-26 AWG solid and stranded cables.
- Supports T568 A&B Wiring & Easy installation.
- Terminate using 110 or Krone tools.
- Backward compatible to Category 5e, 5, and 3.
- Stuffer caps provided.



CHARACTERISTICS:

***Panel:**

Item	Material	Thickness	Plated	Dimensions and Mounting
Panel	SECC	1.5mm	Painted black	EIA – 310-D

***IDC Connector:**

Item	Material or Feature
Operating life	Minimum 250 Re-terminations
Contact Material	Phosphor bronze
IDC Contact Plating	Tin plated ver Nickel
IDC Plastic Housing	PC, UL94V-0

***Jack Connector:**

Item	Material or Feature
Operating life	Minimum 750 insertions
Contact Material	Phosphor bronze
Jack Contact Plating	50µ inch thickness gold over Nickel
Jack Plastic Housing	Glass filled polyester UL94V-0

***Printed Circuit Board:**

Item	Material or Feature
Materials	FR-4
Thickness	1.6mm

***Accessories:** Cable ties, M6x12 screws


APPROVALS:

- Performance conforms to TIA/EIA-568-B.2-1, ISO/IEC 11801 and EN 50173-1 Category 6 specifications.
- UL/cUL Listed.


APPLICATIONS:

- 1000BASE-TX Gigabit Ethernet
- 100BASE-TX Fast Ethernet
- 10BASE-TX Ethernet
- Voice, Video and other application

TYPICAL PERFORMANCE:

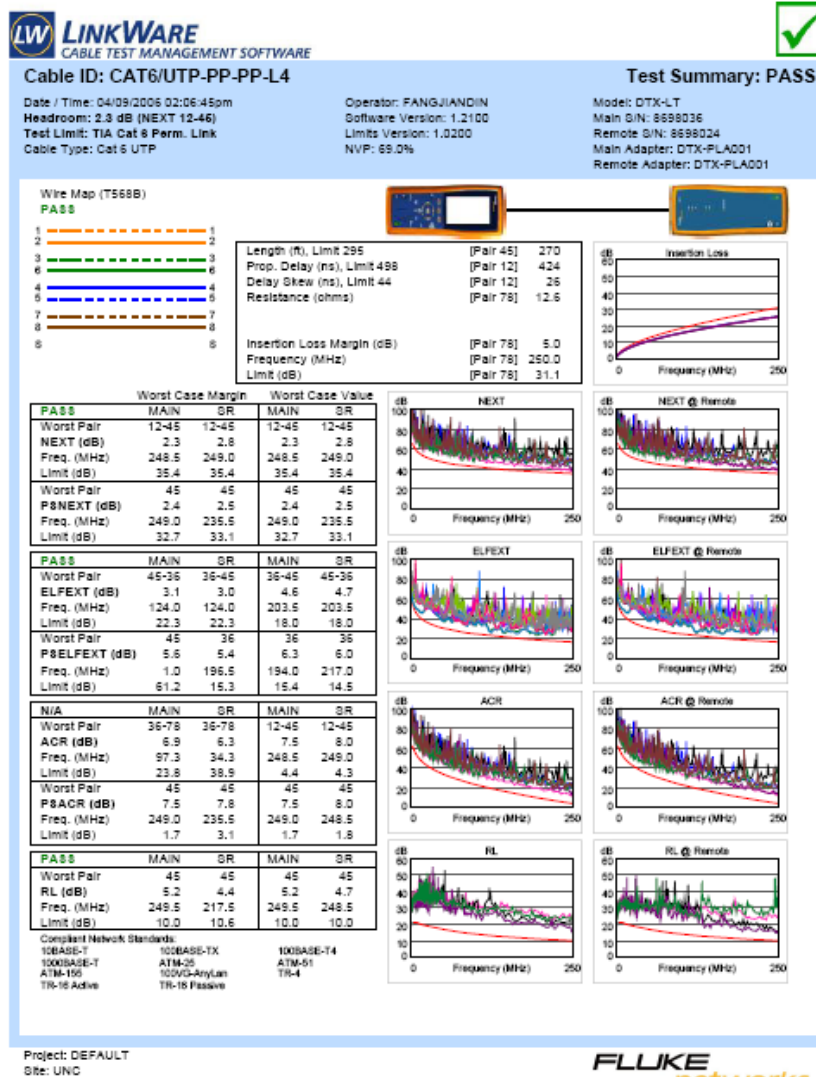

DRAWING:

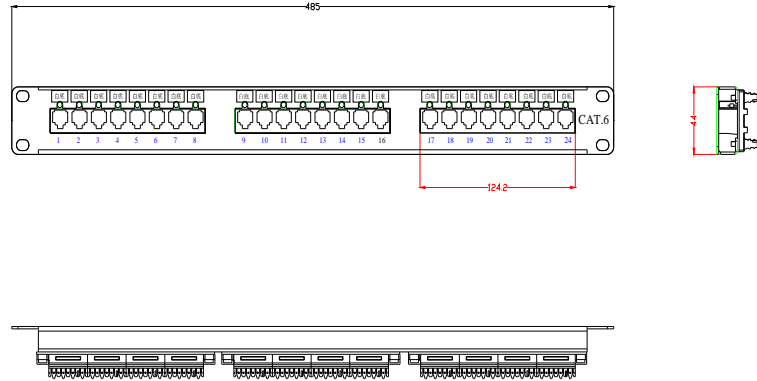

ORDERING INFORMATION:

Part NO.	176522412
Description	Cat.6 Unshielded Navigator Patch Panel, Dual Type IDC, 24 ports, Black